



## Model Name: GO-O-29 Swing Gate Opener


### Technical specification:

- Motor power: 24VDC/90W
- Open/Close Time: 5~15S (adjustable)
- Motor rotational speed: 1500rpm $\pm$ 10%
- Working environment: -20°C ~ +55°C
- Max. gate weight: 180kgs
- Max. open angle: 120°
- Max. gate width: 1800mm

### Feature:

- 24V DC voltage drive, more safe and reliable;
- DC brushless motor, hull element, accurate limit, working stable, long life time at 2 million cycle;
- Self-design gearbox, stable structure, low running sound;
- Safe to use, it has the reverse function: return the gate when gate is blocked during closing, stop the gate when gate is blocked during opening;
- Soft start and soft stop;
- Auto-close function is available;
- LED light shows the working statuses: Green when the gate full open at open limit, RED during opening and closing;
- Yellow when gate is blocked or the operator is fault;
- IP 54 is suitable for outdoor using;
- Photocell, radar, access control system (face recognition, card reader, finger print identifier) and other sensing devices can be connected externally;
- With fire alarm linkage connection.

## Dimension

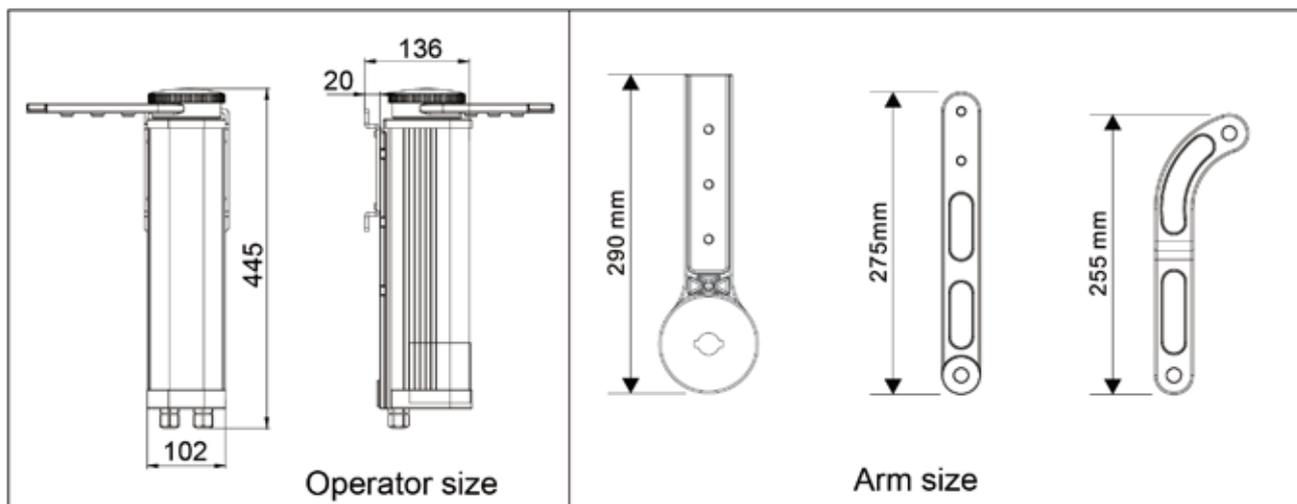

Disclaimer : Brief specifications are mentioned here. Specifications may change without prior notice. Customers are advised to check with us before purchase. Actual product may differ slightly to that depicted for ongoing product development.  
[www.esslsecurity.com](http://www.esslsecurity.com)